

### تعريف وتشغيل جهاز الإنذار على التطبيق

1. قم بتوصيل جهاز الإنذار الرئيسي بالكهرباء أو بالبطاريات
2. اضغط بشكل مستمر على زر (الإعدادات والموسيقى) الموجود على أعلى الجهاز في آن واحد حتى تبدأ الإضاءة بالترميز باللون البنفسجي بشكل سريع (ستستمر الإضاءة لمدة 3 دقائق)
3. على الصفحة الرئيسية للتطبيق قم بالضغط على إشارة الـ (+) أو على خيار (إضافة جهاز)
4. قم باختيار (إنذار Wi-Fi)
5. قم باختيار شبكة الإنترنت اللاسلكية الخاصة بك ثم اضغط على زر (التالي)
6. تأكد من أن الخيار المستخدم في أعلى الصفحة هو خيار (وضع AP)
7. قم باختيار (أكد أن المؤشر يرمش بشكل سريع) ثم اضغط زر (التالي)
8. اضغط زر (تسجيل الدخول الآن)، ثم قم باختيار الشبكة اللاسلكية Smart Life من قائمة الشبكات
9. عد إلى صفحة الإعدادات في تطبيق Smart Life في حال عدم العودة تلقائياً للتطبيق
10. انتظر حتى تتم عملية إضافة الجهاز ثم اضغط على زر (تم)
11. ستظهر شاشة التحكم بجهاز الإنذار
12. ستتمكن من التحكم بجهاز الإنذار من خلال تفعيل الحماية وإيقافها من خلال الأزرار (Arm / Disarm)

### تعريف وتشغيل حساس النافذة والباب

1. يتم تعريف هذا الجهاز تلقائياً من خلال صفحة جهاز الإنذار الرئيسي
2. يمكن التحكم في الحساس عن طريق صفحة (accessories) الموجودة في شاشة جهاز الإنذار

### ملاحظة

في حال عدم ظهور زر (تسجيل الدخول الآن) في المرحلة رقم 8، يرجى اتباع الخطوات التالية:

1. انتظر حتى تنتهي عملية إضافة الجهاز، ثم اضغط على زر (Switch Pairing Mode)
2. قم بالضغط على زر (تأكيد أن المؤشر يرمش بشكل سريع)
3. قم باختيار شبكة الإنترنت اللاسلكية الخاصة بك، ثم اضغط على زر (التالي) على التطبيق
4. اضغط زر (تسجيل الدخول الآن) ثم قم باختيار الشبكة اللاسلكية Smart Life من قائمة الشبكات اللاسلكية
5. ستتم عملية إضافة الجهاز وستتمكن من التحكم به من خلال تفعيل الحماية وإيقافها من خلال الأزرار (Arm / Disarm)

يرجى الاحتفاظ بعلب الأجهزة المثبت عليها الرقم التسلسلي لتأكيد الكفالة



## حساس الحركة

### تحميل تطبيق Smart Life

1. قم بتحميل تطبيق Orange Smart Life JO



2. افتح التطبيق

3. قم بالتسجيل باستخدام بريدك الإلكتروني، حيث أن المشترك وحده هو المسؤول عن حماية اسم المستخدم وكلمة المرور الخاصة بتطبيق Orange Smart Life JO، وينصح بعدم مشاركتها مع أي شخص. الفريق الفني الخاص بـ Orange سوف يكون مسؤولاً فقط عن تقديم خدمات ضبط وإعادة تهيئة الأجهزة في حال طلب المساعدة
4. قم باختيار (الحصول على رمز)، وسيصلك رمز التحقق على بريدك الإلكتروني
5. قم بتعبئة الرمز المكون من ست خانات في المكان المخصص على التطبيق
6. قم بإدخال الرقم السري الخاص بك
7. قبل ضبط وإعداد أي جهاز، يجب تفعيل خاصية الموقع الجغرافي من جهازك الخليوي ليتم الربط على شبكة الإنترنت اللاسلكية الخاصة بك



## Motion sensor



### Download the Smart Life application

1. Download Orange Smart Life JO application



After downloading the application, go to your iPhone settings, then go to (General), then to (Device Management), then press on (Hangzhou Miaoyong...), then trust (Hangzhou Miaoyong...), and finally press on (Confirm)

2. Open the application
3. Register using your e-mail, as the user alone is responsible for protecting the username and password for Orange Smart Life JO application, and we recommend not to share the username and the password with anyone. Orange technical team will be responsible of providing setup and configuration support for the devices
4. Select (Get a code), the verification code will be sent to your e-mail
5. Fill out the six-digit code in the space provided on the application
6. Enter your password
7. Before setting up any device, you must activate the GPS feature from your mobile device in order to be connected to your wireless network

### Configuring and operating the alarm on the application

1. Plug the main alarm into electricity or batteries
2. Press and hold the (Setting) and (Music) buttons that is on top of the device until the light begins to blink quickly in purple (the light will continue for 3 minutes)
3. On the main page of the application, press the (+) sign or the (Add device) option
4. Choose (Wi-Fi Alarm)
5. Choose your wireless internet network and click the (Next) button
6. Make sure that the option used at the top of the page is the (AP Mode) option
7. Choose (Confirm indicator blinks quickly) and click (Next)
8. Click the (Go to Connect) button, and then choose the Smart Life wireless network from the list of networks
9. Return to the settings page in the Smart Life application in case it does not take you automatically to the application
10. Wait for the device to be added, then press the (Done) button
11. The alarm control screen will appear
12. You will be able to control the alarm by turning protection on and off with the (Arm / Disarm) buttons

### Configuration and operating of Window and Door Sensor


1. This device is automatically configured through the main alarm page
2. The sensor can be controlled via the (accessories) page on the alarm screen

### Note:

If the (Go to Connect) button at stage 8 does not appear, please follow these steps:

1. Wait for the pairing process to finish, and then press the (Switch Pairing Mode) button
2. Click the (Confirm indicator blinks quickly) button
3. Choose your wireless internet network and click the (Next) button on the application
4. Click the (Go to Connect) button, and then choose the Smart Life wireless network from the list of wireless networks
5. The device will be added, and you will be able to control the sensor by activating and deactivating the protection through the (Arm / Disarm) buttons

Please keep the boxes with the serial number to confirm the warranty

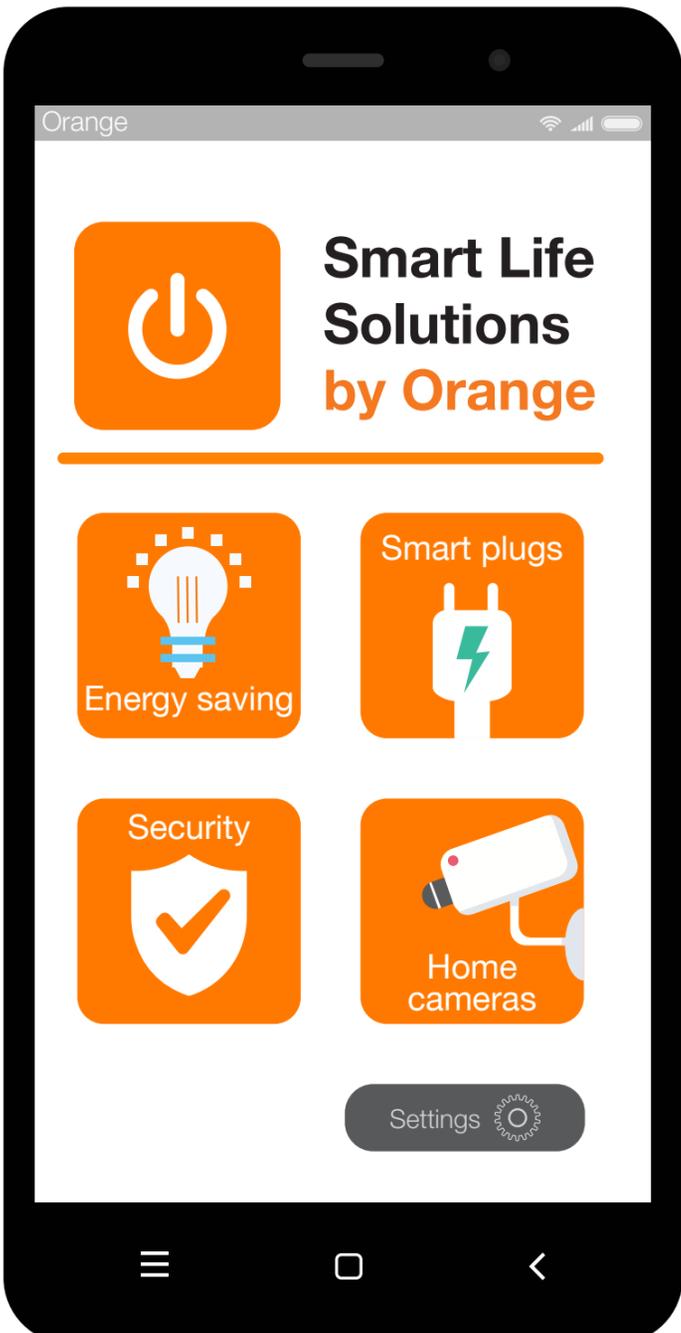

### تعريف الكاميرا على التطبيق

1. قم بتوصيل الكاميرا بالكهرباء
2. انتظر سماع الصوت التنبيهي للكاميرا
3. قم بالضغط على الزر الأسود الموجود خلف الكاميرا عند مدخل الشاحن حتى سماع صوت تنبيهي
4. على الصفحة الرئيسية للتطبيق قم بالضغط على إشارة الـ (+) أو على خيار (إضافة جهاز)
5. قم باختيار (الكاميرا الذكية)
6. تأكد من أن الخيار المستخدم في أعلى الصفحة هو خيار (رمز الاستجابة السريعة)
7. قم باختيار (قم بالتأكد من أن المؤشر يرمش بشكل سريع أو أكد سماع نغمة التنبيه) ثم قم بالضغط على زر (التالي) على التطبيق
8. قم باختيار شبكة الإنترنت اللاسلكية الخاصة بك ثم اضغط على زر (التالي) ثم (استمرار)
9. سيظهر رمز QR على صفحة التطبيق على شاشة الهاتف، قم بمسح الرمز من خلال توجيه شاشة الهاتف على الكاميرا مباشرة، مع مراعاة ترك مسافة 20 سم بين شاشة الهاتف والكاميرا
10. بعد سماع الصوت التنبيهي للكاميرا قم باختيار (سماع نغمة التنبيه)
11. انتظر لحين اكتمال عملية إضافة الكاميرا ثم اضغط على (تم)
12. ستظهر صورة الكاميرا على شاشتك بالإضافة إلى خيارات التحكم

يرجى الاحتفاظ بعلب الأجهزة المثبت عليها الرقم التسلسلي لتأكيد الكفالة



## الكاميرا

### تحميل تطبيق Smart Life

1. قم بتحميل تطبيق Orange Smart Life JO



بعد تحميل التطبيق على جهازك، اذهب إلى إعدادات الـ iPhone، ثم اذهب إلى (عام)، ثم إلى (إدارة الجهاز)، ثم اضغط على (Hangzhou Miaoyong...)، ثم على (الوثوق في Hanzhou Miaoyong...)، ثم اضغط على (تأكيد الوثوق)

2. افتح التطبيق
3. قم بالتسجيل باستخدام بريدك الإلكتروني، حيث أن المشترك وحده هو المسؤول عن حماية اسم المستخدم وكلمة المرور الخاصة بتطبيق Orange Smart Life JO، وينصح بعدم مشاركتها مع أي شخص. الفريق الفني الخاص بـ Orange سوف يكون مسؤولاً فقط عن تقديم خدمات ضبط وإعادة تهيئة الأجهزة في حال طلب المساعدة
4. قم باختيار (الحصول على رمز)، وسيصلك رمز التحقق على بريدك الإلكتروني
5. قم بتعبئة الرمز المكون من ست خانات في المكان المخصص على التطبيق
6. قم بإدخال الرقم السري الخاص بك
7. قبل ضبط وإعداد أي جهاز، يجب تفعيل خاصية الموقع الجغرافي في جهازك الخلوي ليتم الربط على شبكة الإنترنت اللاسلكية الخاصة بك



## Camera

### Download the Smart Life application

1. Download Orange Smart Life JO application




After downloading the application, go to your iPhone settings, then go to (General), then to (Device Management), then press on (Hangzhou Miaoyong...), then trust (Hangzhou Miaoyong...), and finally press on (Confirm)

2. Open the application
3. Register using your e-mail, as the user alone is responsible for protecting the username and password for Orange Smart Life JO application, and we recommend not to share the username and the password with anyone. Orange technical team will be responsible of providing setup and configuration support for the devices
4. Select (Get a code), the verification code will be sent to your e-mail
5. Fill out the six-digit code in the space provided on the application
6. Enter your password
7. Before setting up any device, you must activate the GPS feature from your mobile device in order to be connected to your wireless network

### Configuring the camera on the application

1. Connect the camera to the electricity
2. Wait for the camera's alert sound
3. Press the black button that is behind the camera, next to the charging port until you hear the beeping sound
4. On the main page of the application, press the (+) sign or the add device option
5. Choose (Smart Camera)
6. Make sure the chosen option at the top of the page is (Quick response code)
7. Select (make sure the indicator is flashing quickly or a prompt tone is heard) and then press the next button on the app
8. Choose your wireless internet network, click the (Next) button, and then (Continue)
9. The QR code will appear, on the application page on the phone screen, scan the code by facing the phone screen with the camera considering leaving 20 cm between the phone screen and the camera
10. After hearing the camera's alert sound, choose (I heard the alerting sound)
11. Wait for the camera add-on process to complete, and then press (Done)
12. Camera image will appear on your screen as well as control options

Please keep the boxes with the serial number to confirm the warranty

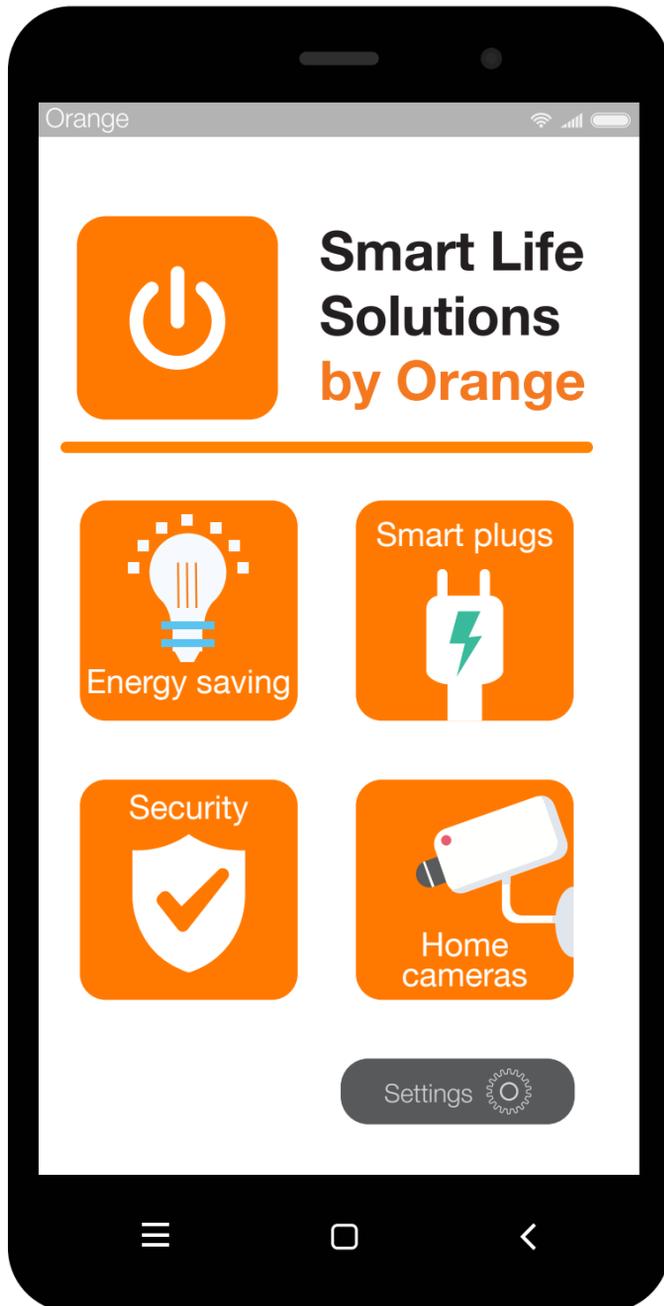

- تحميل وتعريف جهاز الـ Plug على التطبيق**
1. قم بتوصيل جهاز الـ Plug في مصدر تيار كهربائي
  2. اضغط على زر التشغيل الموجود على الجهاز
  3. قم بالضغط على زر التشغيل مطولاً (لمدة 5 ثوان) حتى يبدأ الجهاز بالترميز السريع
  4. عندما تبدأ الإضاءة بالترميز السريع، قم بالضغط مطولاً مرة أخرى (لمدة 5 ثوان) حتى يبدأ الجهاز بالترميز البطيء
  5. على الصفحة الرئيسية للتطبيق قم بالضغط على إشارة الـ (+) أو على خيار (إضافة جهاز)
  6. قم باختيار مقبس (Wi-Fi)
  7. قم باختيار شبكة الإنترنت اللاسلكية الخاصة بك ثم اضغط على زر (التالي)
  8. تأكد من أن الخيار المستخدم في أعلى الصفحة هو خيار (وضع AP)
  9. قم بالضغط على (التالي) حتى يتم المرور على جميع صفحات تعليمات ضبط الجهاز
  10. قم باختيار (أكد أن المؤشر يرمش بشكل بطيء) ثم اضغط زر (التالي)
  11. اضغط زر (تسجيل الدخول الآن) ثم قم باختيار الشبكة اللاسلكية Smart Life من قائمة الشبكات
  12. عد إلى صفحة الإعدادات في تطبيق Smart Life في حال عدم العودة تلقائياً للتطبيق
  13. انتظر لحين إضافة الجهاز، ثم اضغط على خيار (تم)
  14. ستظهر لك على شاشة هاتفك شاشة التحكم، والتي يمكنك من فصل وتوصيل التيار الكهربائي من خلال جهاز الـ Plug
- يرجى الاحتفاظ بعلب الأجهزة المثبت عليها الرقم التسلسلي لتأكيد الكفالة



## جهاز الـ Plug


### تحميل تطبيق Smart Life

1. قم بتحميل تطبيق Orange Smart Life JO



بعد تحميل التطبيق على جهازك، اذهب إلى إعدادات الـ iPhone، ثم اذهب إلى (عام)، ثم إلى (إدارة الجهاز)، ثم اضغط على (Hangzhou Miaoyong...)، ثم على (الوثوق في Hanzhou Miaoyong...)، ثم اضغط على (تأكيد الوثوق)

2. افتح التطبيق
3. قم بالتسجيل باستخدام بريدك الإلكتروني، حيث أن المشترك وحده هو المسؤول عن حماية اسم المستخدم وكلمة المرور الخاصة بتطبيق Orange Smart Life JO، وينصح بعدم مشاركتها مع أي شخص. الفريق الفني الخاص بـ Orange سوف يكون مسؤولاً فقط عن تقديم خدمات ضبط وإعادة تهيئة الأجهزة في حال طلب المساعدة
4. قم باختيار (الوصول على رمز)، وسيصلك رمز التحقق على بريدك الإلكتروني
5. قم بتعبئة الرمز المكون من ست خانات في المكان المخصص على التطبيق
6. قم بإدخال الرقم السري الخاص بك
7. قبل ضبط وإعداد أي جهاز، يجب تفعيل خاصية الموقع الجغرافي من جهازك الخلوي ليتم الربط على شبكة الإنترنت اللاسلكية الخاصة بك

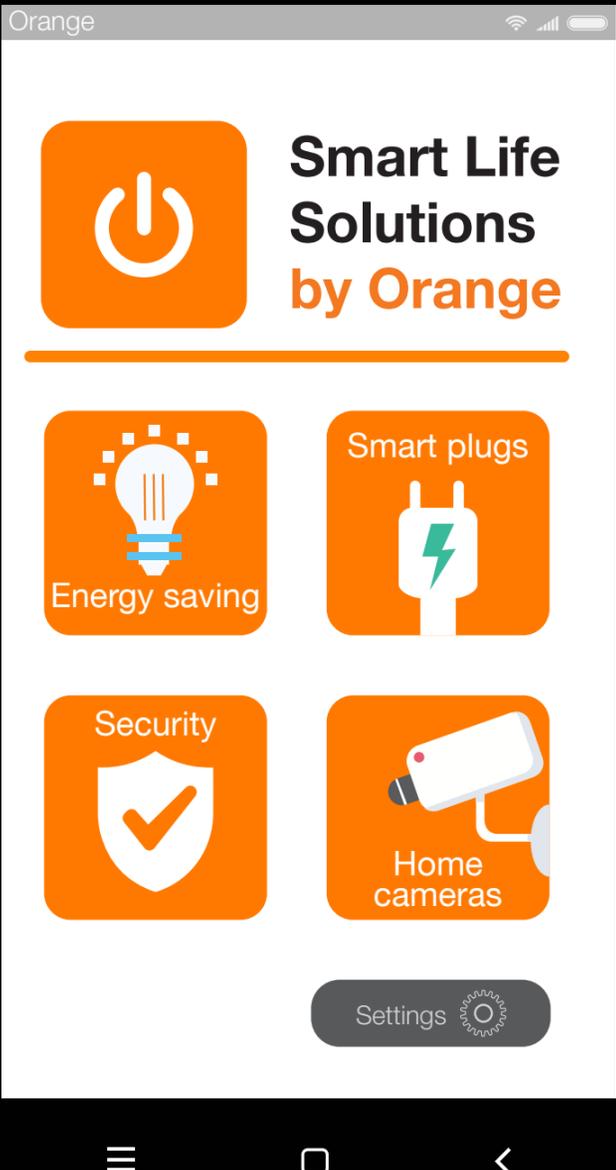

## Plug Device



### Download the Smart Life application

1. Download Orange Smart Life JO application



After downloading the application, go to your iPhone settings, then go to (General), then to (Device Management), then press on (Hangzhou Miaoyong...), then trust (Hangzhou Miaoyong...), and finally press on (Confirm)

2. Open the application
3. Register using your e-mail, as the user alone is responsible for protecting the username and password for Orange Smart Life JO application, and we recommend not to share the username and the password with anyone. Orange technical team will be responsible of providing setup and configuration support for the devices
4. Select (Get a code), the verification code will be sent to your e-mail
5. Fill out the six-digit code in the space provided on the application
6. Enter your password
7. Before setting up any device, you must activate the GPS feature from your mobile device in order to be connected to your wireless network

### Downloading and configuring the plug device on the application

1. Plug the device into an electrical outlet
2. Press the power button on the device
3. Long press the Power button (for 5 seconds) until the device begins to blink quickly
4. When the light starts to blink fast, long press the Power button again (for 5 seconds) until the device begins to blink slowly
5. On the main page of the application, press the (+) sign or (Add device) option
6. Choose the (Wi-Fi) socket
7. Choose your wireless internet network and click the (Next) button
8. Make sure that the option used at the top of the page is the (AP Mode) option
9. Press (Next) until all pages of device setup instructions are passed
10. Choose (Confirm indicator blinks slowly) and click (Next)
11. Click the (Go to Connect) button, then choose Smart Life wireless network from the list of networks
12. Return to settings in the app in case it does not take you automatically to the application
13. Wait for the device to be added, then press the option (Done)
14. On your phone a control screen will appear that enables you to connect and disconnect the electrical current through the plug device

Please keep the boxes with the serial number to confirm the warranty